	σ	)
	ĕ	
	⋍	
٠	۰	
	⊆	
•	₹	
	≂	
	e ot b	
¢	-	
	O	
	~	
	a	
	ح	
	⊏	
•	Ξ	
	Ē	
٠	·	
	σ	
	e at	
	Ψ	
٠	Irat	
	σ	
	⋍	
	$\supset$	
	U	
	υ	
	ത	
	s accur	
	Jent	
	$\subseteq$	
	Φ	
	$\subseteq$	
	Φ	
	uren	
	⊐	
	ä	
	ñ	
	neas	
	⊱	
	_	
٠	ب	
	Φ	
	a	
	ح	
-	77	
	٠,	
	O	
	Ó	
	pec she	
	ຯ	
(	J)	

			For Comme	ercial, I
			JOB NAME _	
			LOCATION _	
			ENGINEER _	
FLANG	E GAN	IAVA	APPROVAL _	

## For Commercial, Institutional or Industrial Applications


CONTRACTOR \_

APPROVAL \_\_\_\_\_

ENGINEER \_\_\_\_\_ CONT. P.O NO. \_\_\_\_\_

REPRESENTATIVE \_\_\_\_\_

## **Roll Grooved Copper Flange**

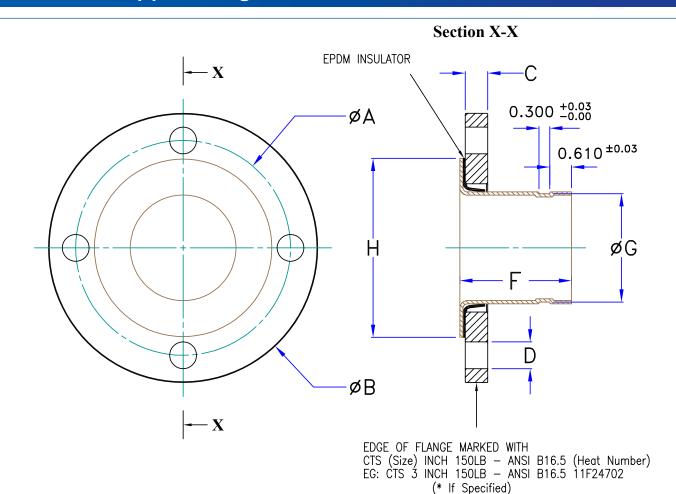

		2 INCH	2.5 INCH	3 INCH	4 INCH	5 INCH	6 INCH
	Code	WRG1020	WRG1025	WRG1003	WRG1004	WRG1005	WRG1006
A.	Bolt Circle Diam	4.75	5.50	6.00	7.50	8.50	9.50
В.	Flange Diameter	6.00	7.00	7.50	9.00	10.0	11.0
C.	Flange Thickness	0.63	0.63	0.63	0.71	0.75	0.87
	No. Bolt Holes	4	4	4	8	8	8
D.	Bolt Hole Diam	0.75	0.75	0.75	0.75	0.87	0.87
	Cu tube End OD	2.125	2.625	3.125	4.125	5.125	6.125
F.	Cu Piece Length	2.63	2.00	2.44	2.88	3.94	4.31
G.	Groove Dia (+0/-0.02)	2.029	2.525	3.025	4.019	5.019	5.999
Н.	Cu Flange OD	3.70	4.20	5.00	6.20	7.30	8.40



THIRD ANGLE

ANSI B16.5 150LB POWDER COATED
CTS FLANGE & COPPER ROLL GROOVED PIECE

Dimension Unit. Inches (Decimal)

Drawing No. USA-20170317-106

DRN BY FAS.
DATE: MAR 17-2017
CHK BY FAS.
DATE: MAR 17-2017
APR BY: FAS.
DATE MAR 17-2017
Rev. A

GTS FLANGE